



T315XW01 VF (QD32HL02)

1/23

Product Description:			
AUO Model Name: T315XW01 VF (QD32HL02)			
Customer Part No/Project Name:			
Customer Signature	Date	AUO	Date
		Approved By: Frank Ko	
		Reviewed By: HongJye Hong	
		Prepared By: CT Wu	



T315XW01 VF (QD32HL02)

2/23

Document Version : 02

Date : 2006/11/20

Product Specifications

31.5" WXGA Color TFT-LCD Module

Model Name: T315XW01 VF
(QD32HL02)

() Preliminary Specifications

(*) Final Specifications



T315XW01 VF (QD32HL02)

3/23

These specification sheets are the proprietary product of **AUO Optronics Inc. ("AUO")** and include materials protected under copyright of **AUO**. Do not reproduce or cause any third party to reproduce them in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of **AUO**.

The device listed in these technical literature sheets was designed and manufactured for use in OA equipment.

In case of using the device for applications such as control and safety equipment for transportation (aircraft, trains, automobiles, etc.), rescue and security equipment and various safety related equipment which require higher reliability and safety, take into consideration that appropriate measures such as fail-safe functions and redundant system design should be taken.

Do not use the device for equipment that requires an extreme level of reliability, such as aerospace applications, telecommunication equipment (trunk lines), nuclear power control equipment and medical or other equipment for life support.

AUO assumes no responsibility for any damage resulting from the use of the device, which does not comply with the instructions, and the precautions specified in these technical literature sheets.

Contact and consult with an **AUO** sales representative for any questions about this device.



©Copyright AU Optronics, Inc.
January, 2006 All Rights Reserved. T315XW01 VF - Specs. Ver 02
No Reproduction and Redistribution Allowed



T315XW01 VF (QD32HL03)

5/23

TABLE OF CONTENTS

	Page
1. Application	... 6
2. Overview	... 6
3. General Specifications	... 6
4. Absolute Maximum Ratings	... 7
5. Electrical Specification	... 7
5-1. TFT-LCD Module Driving	... 7
5-2. TFT-LCD Pin Assignment	... 9
5-3. Backlight Driving	... 10
5-4. Backlight Inverter Connection	... 11
5-5. Signal Timing	... 13
5-6. Reference of Signal data and color	... 14
6. Optical Specification	... 15
7. Mechanical Specification	... 20
8. Reliability Test	... 22
9. Others	... 23



T315XW01 VF (QD32HL03)

6/23

1. Application

This specification applies to a color TFT-LCD module QD32HL02.

2. Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel; driver ICs, control circuit and power supply circuit and a backlight unit. Graphics and texts can be displayed on a 1366×3×768 dots, Wide XGA mode, with 16,777,216 colors by using 8-bit 1 channel LVDS (Low Voltage Differential Signaling) to interface and +12V DC supply voltage for TFT-LCD panel driving.

The TFT-LCD panel used for this module has wide view angles and fast response time. Display mode is normally black. Each pixel is divided into Red, Green and Blue sub-pixels, which are arranged in vertical strips. A low-reflection surface treatment and high-color-saturation type color filter are also used for this panel. Therefore, this module is suitable for the multimedia use. Especially TV can be obtained by using this module.

[Features]

- 1) High contrast image. (800:1)
- 2) High brilliant image. (500 nits)
- 3) Wide viewing angle. (88/88/88/88)
- 4) Fast response time. (21ms)
- 5) High color saturation. (NTSC 72%)
- 6) WXGA resolution. (1366x768)
- 7) LVDS interface. (8-bit 1 channel)

3. General Specification

Parameter	Specifications	Unit
Display size	80.04 (31.5") Diagonal	mm
Active area	697.685 (H) × 392.256 (V)	mm
Pixel format	1366 (H)×768 (V) ; (1 pixel = R+G+B dots)	Pixel
Pixel size	0.5107 (H) × 0.5107 (V)	mm
Pixel configuration	R, G, B vertical stripe	
Color depth	16.7M colors	
Luminance (Center point typ.)	500	Cd/m ²
Contrast Ratio	1000:1	
View angle	88/88/88/88	
Display mode	Normally Black	
Unit outline dimensions (typ.)*1	760.0×450.0×48.0	mm
Weight (Max.)	6000	g
Surface treatment	Anti-glare and hard-coating 3H	
Lamp Quantity	Direct 16 Lamps	pcs

*1.Note : excluding backlight cables.



T315XW01 VF (QD32HL03)

7/23

4. Absolute Maximum Ratings

LCD module

Parameter	Symbol	Condition	Ratings	Unit	Remark
Panel Input Voltage	V _{CC}	Ta=25℃	-0.3 ~ +14.0	V _{DC}	
Storage temperature	T _{stg}	—	-20 ~ +60	℃	【Note1】
Operating temperature (Ambient)	T _{opa}	—	0 ~ +50	℃	

Note 1. Humidity : 90%RH Max. at Ta≤40℃. Maximum wet-bulb temperature at 39℃ or less at Ta>40℃.

No condensation.

5. Electrical Specifications

5-1. TFT-LCD Module Driving

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
V _{CC}	Supply voltage	V _{CC}	+11.4	+12.0	+12.6	V	Note 2.
	Current dissipation	I _{CC}	---	400	700	mA	Note 3.
	Rush current	I _{CCS}	---	---	3.0	A	
	Permissive Input Ripple Voltage	V _{rp}	---	---	120	mV	
Differential input	High	V _{TH}	---	---	+100	mV	V _{CM} =+1.2V
Threshold voltage	Low	V _{TL}	-100	---	---	mV	Note 1.
Input current (High)		I _{OH}	---	---	+/- 10	μA	V _I =2.4V V _{CC} =3.6V
Input current (Low)		I _{OL}	---	---	+/- 10	μA	V _I =0V V _{CC} =3.6V
Terminal resistor		R _T	---	100	---	Ω	Differential input


Note 1. V_{CM} : Common mode voltage of LVDS driver.

Note 2. On-off conditions for supply voltage




T315XW01 VF (QD32HL03)

8/23

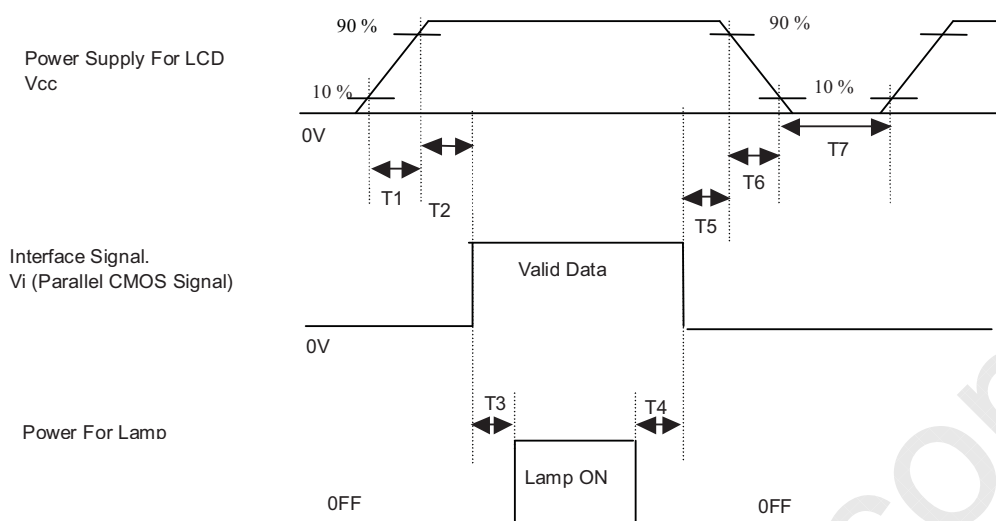


$0.1 \leq t_1 \leq 10 \text{ ms}$; $0 < t_2 \leq 50 \text{ ms}$; $200 \text{ ms} \leq t_3$; $200 \text{ ms} \leq t_4$; $0 < t_5 \leq 50 \text{ ms}$; $0 < t_6 \leq 10 \text{ ms}$;
 $400 \text{ ms} < t_7$

Note 3. Typical current condition: 2-line vertical stripe pattern (0,255GS). $V_{CC}=+12V$

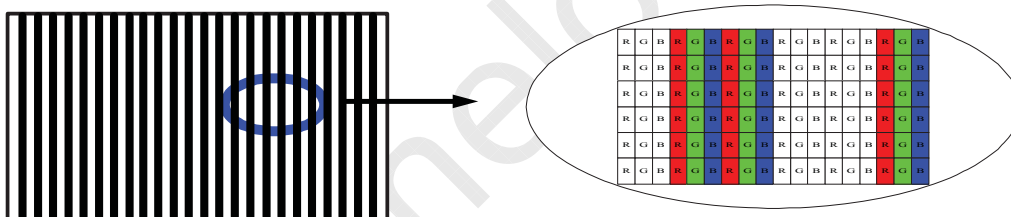

Max current condition: 1x1dot Checker Board Pattern (0, 255GS). $V_{CC}=+12V$

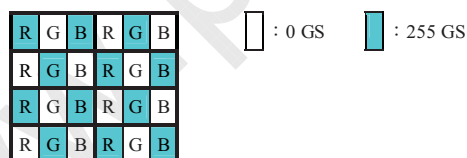



T315XW01 VF (QD32HL03)

9/23

5-2. TFT-LCD Pin Assignment

Mating connector: FI-X30SSL-HF (Manufactured by JAE) or Equivalent

Pin No.	Symbol	Function	Remark
1	VDD	+12V Input	
2	VDD	+12V Input	
3	VDD	+12V Input	
4	VDD	+12V Input	
5	GND	Power Ground	
6	GND	Power Ground	
7	GND	Power Ground	
8	GND	Power Ground	
9	LVDS Option	LVDS data mapping	Low/Open for Normal (NS), High for JEIDA
10	Reserved	N.C.	
11	GND	Ground	
12	RXIN0-	LVDS data input	
13	RXIN0+	LVDS data input	
14	GND	Ground	
15	RXIN1-	LVDS data input	
16	RXIN1+	LVDS data input	
17	GND	Ground	
18	RXIN2-	LVDS data input	
19	RXIN2+	LVDS data input	
20	GND	Ground	
21	RXCLKIN-	LVDS data input	
22	RXCLKIN+	LVDS data input	
23	GND	Ground	
24	RXIN3-	LVDS data input	
25	RXIN3+	LVDS data input	
26	GND	Ground	
27	Reserved	N.C.	
28	NTSC_PAL_Selection	OD table selection	Low/Open for PAL Hight for NTSC
29	GND	Ground	
30	GND	Ground	

Note 1. All GND(ground) pins should be connected together and to VDD which should also be connected to the LCDs metal frame.

Note 2. Relation between LVDS signals and actual data shows below section (7-1).

Note 3. All VDD (power supply) pins should be connected together.



T315XW01 VF (QD32HL03)

10/23

5-3. Backlight driving

The backlight system is a direct-lighting type with 16 CCFT (Cold Cathode Fluorescent Tube). The characteristics of the lamp are shown in the following table.

Parameter			Symbol	Values			Unit	Notes		
				Min	Typ	Max				
Inverter										
Power Supply Input Voltage			VDDb	22.8	24.0	26.2	Vdc			
Power Supply Input Current			IDDb	3.3	3.8	4.3	A			
Power Consumption			PB	---	96	108	W			
Input Voltage for Control System Signals		BRTI Signal		VBI	0	---	3.8	V		
		BRTC	Low	VBCL	0	---	0.8	V		
			High	VCBH	2.0	3.5	5.0	V		
LAMP										
Lamp current			IL	---	5.0	---	mA			
Lamp voltage			V L	(1089)	(1210)	(1331)	Vrms	25℃		
Lamp power consumption			PL	---	(6.05)	---	W	Note 2. IL=5mA		
Lamp frequency			F0	---	(60)	---	kHz	Note 3		
Established starting voltage			Vs	---	(1360)	(1630)	Vrms	Ta = 25℃		Note 4
					(1700)	(2040)	Vrms	Ta = 0℃		
Lamp life time			LL	50000	---	---	hour	Note 5.		

Note 1. Lamp current is measured with current meter for high frequency.

Note 2. Calculated Value for reference (IL × V L)

Note 3. Lamp frequency may produce interference with horizontal synchronous frequency, and this may cause beat on the display. Therefore lamp frequency shall be detached as much as possible from the horizontal synchronous frequency and from the harmonics of horizontal synchronous to avoid interference.

Note 4. The voltage above this value should be applied to the lamp for more than 1 second to start-up. Otherwise the lamp may not be turned on.

Note 5. The life is determined as the time at which luminance of the lamp is 50% compared to that of initial value at the typical lamp current on condition of continuous operating at 25 ± 2°C.

Note 6. The performance of the backlight, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter (miss-lighting, flicker, etc.) never occur. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.

Note 7. Protection function : if one lamp cannot light on well, the inverter will shut down all lamps.




T315XW01 VF (QD32HL03)

11/23

5-4. Backlight Inverter Connection

5-4-1. Inverter Connector:

Connector	Type	Manufactured
CN1	S14 B-PH-SM3 TB	JST
CN2	SM02(12B)-BHS-1-TB	JST
CN3	S2B-ZR-SM3A-TF	JST

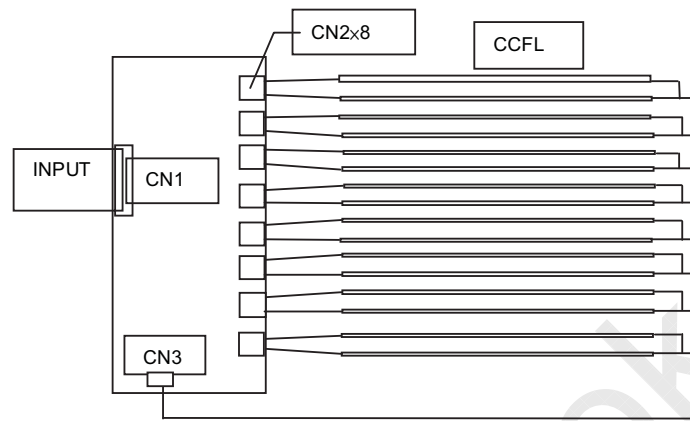

5-4-2. Inverter Connector Pin Assignment :

CN1: PHR-14(JST) or Equivalent

Pin No.	Symbol	Description	Remark
1	VIN	Operating Voltage Supply, +24V DC regulated	24V
2	VIN	Operating Voltage Supply, +24V DC regulated	24V
3	VIN	Operating Voltage Supply, +24V DC regulated	24V
4	VIN	Operating Voltage Supply, +24V DC regulated	24V
5	VIN	Operating Voltage Supply, +24V DC regulated	24V
6	BLGND	Ground and Current Return	GND
7	BLGND	Ground and Current Return	GND
8	BLGND	Ground and Current Return	GND
9	BLGND	Ground and Current Return	GND
10	BLGND	Ground and Current Return	GND
11	ADIM ⁽¹⁾	GND (0V) 80% Lum / Open (1.6V) 100% Lum / High (3.3V) 120% Lum	100%
12	ON/OFF	BL On-Off: Open/High (3.3V) for BL On as default	On
13	PDIM ⁽²⁾	PWM Dimming Control: Open/High (3.3V) for 100% Lum	100%
14	PWM Selection ⁽³⁾	Open/GND: Duty Signal to 13pin, High: Analog Voltage to 13 pin	Analog



T315XW01 VF (QD32HL03)


12/23

Note.1 Luminance ratio is linearly controllable in the range of the following table.

BTRI Voltage (VBI)	Luminance ratio
0V	20% (Minimum)
3.3V	100% (Maximum)

- (1) ADIM is control signal for Inverter's output Power to Back Light Lamp Bulb. Input Signal should be able to control Amplitude of Inverter Output voltage. From 0V to 3.3V, Inverter Output Voltage should be able to vary to control Brightness of Lamp from 80% to 120% Luminescence variation.
- (2) PDIM is PWM control input; i.e. for the given ADIM, this PDIM input should be able to control Width of Voltage Burst of inverter output for Lamp Driving. This input can have two type of input; Ordinary default setting is Duty Signal Input with 3.3V TTL specification. The other setting will be DC level signal using Saw Tooth Wave control for PWM duty control. These two method should be decided by 14th Pin input setting.
- (3) 14 Pin is selection pin for PWM control method; if this pin NC or GND, PDIM input of 13th Pin should be direct Duty Signal Input for PWM control. If this is set to High, 13th Pin should have DC level signal and inverter should have Saw Tooth Wave Generator for PWM.

Rear view of LCM

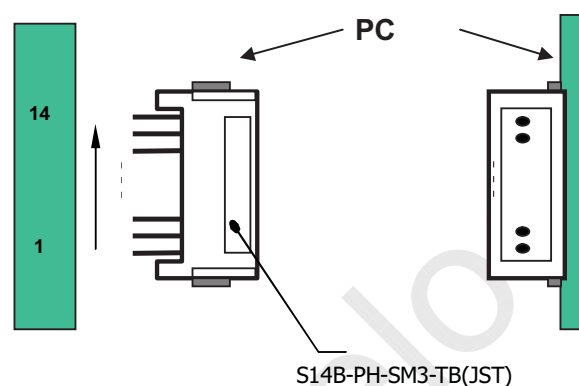



T315XW01 VF (QD32HL03)

13/23


5-5. Signal Timing Spec.

Item		Symbol	Min	Typ	Max	Unit	Notes
DCLK	Frequency	F_{CLK}	---	80	82	MHz	
	Period	t_{CLK}	12.2	12.5	---	ns	
Hsync	Period	t_{HA}	1512	1648	1780	t_{CLK}	
	Width-Active	t_{HC}	8	16	---		
	Frequency	f_H	44	48.54	52	kHz	
Vsync	Frequency	f_V	47	60	63	Hz	
	Period	t_{VA}	774	810	--	t_{HA}	
	Width-Active	t_{VC}	2	6	---		
Data Enable	Horizontal back porch	t_{HD}	8	80	---	t_{CLK}	
	Horizontal front porch	t_{HF}	16	186	---	t_{CLK}	
	Horizontal active	t_{HE}	1366	1366	1366	t_{CLK}	
	Horizontal blanking	t_{HB}	146	282	---	t_{CLK}	
	Vertical back porch	t_{VD}	2	20	---	t_{HA}	
	Vertical front porch	t_{VF}	2	16	---	t_{HA}	
	Vertical active	t_{VE}	768	768	768	t_{HA}	
	Vertical blanking	t_{VB}	6	42	---	t_{HA}	

Note 1. The performance of electro-optical characteristics may be influenced by variance of the vertical refresh rates.

Note 2. Hsync period shall be a double number of character (8).

Note 3. Signal Timing Waveform as below.

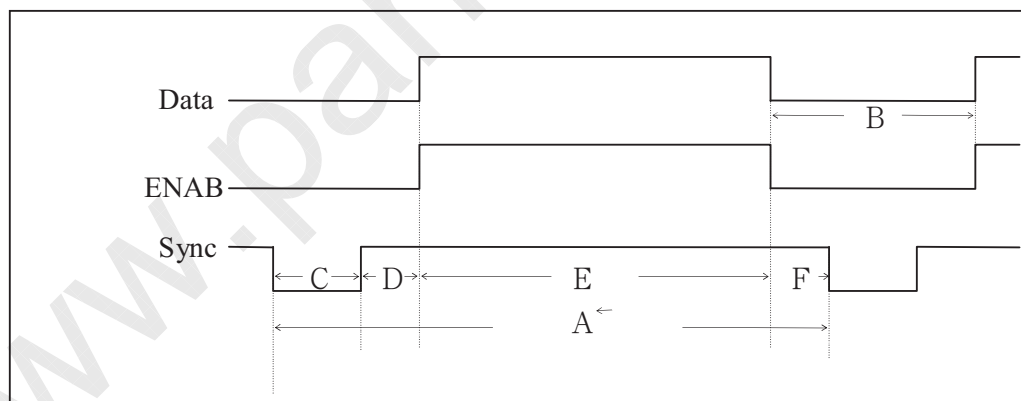



T315XW01 VF (QD32HL03)

14/23

5-6. Reference of Data Signal and Color.

	Colors &		Data signal																							
	Gray scale	Gray Scale	R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7
Basic Color	Black	—	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	—	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	—	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	—	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	—	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	—	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	—	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	—	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	GS2	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	↓	↓								↓								↓							
	↓	↓	↓								↓								↓							
	Brighter	GS253	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↓	GS254	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	GS255	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	GS2	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	↓																								
	↓	↓																								
	Brighter	GS253	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	↓	GS254	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Green	GS255	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale of Blue	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	Darker	GS2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	↑	↓																								
	↓	↓																								
	Brighter	GS253	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1
	↓	GS254	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1
	Blue	GS255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

0 : Low level voltage, 1 : High level voltage

Each basic color can be displayed in 256 gray scales from 8 bit data signals. According to the combination of total 24 bit data signals, the 16,777,216-color display can be achieved on the screen.



T315XW01 VF (QD32HL03)

15/23


6. Optical Specifications

Ta=25°C, V_{CC}=+5V


Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angle range	L/R	θ 21, θ 22	CR>10	85	88	—	Deg.	Note 1,4
	U	θ 11		85	88	—	Deg.	
	D	θ 12		85	88	—	Deg.	
Contrast ratio		C R n	$\theta = 0^{\circ}$	600	800	—		Note 2,4
Response Time (G-G)		τ		—	8	—		Note 5
Response time		τ		—	21	—	ms	Note 3,4
Rise time	τ r			—	16	—	ms	
Fall time	τ d			—	5	—	ms	
Chromaticity of White (CIE 1931)		Wx		0.246	0.276	0.306		Note 4
		Wy		0.236	0.266	0.296		
Chromaticity of Red (CIE 1931)		Rx		0.613	0.643	0.673		NTSC 72 %
		Ry		0.305	0.335	0.365		
Chromaticity of Green (CIE 1931)		Gx		0.252	0.282	0.312		
		Gy		0.571	0.601	0.631		
Chromaticity of Blue (CIE 1931)		Bx		0.116	0.146	0.176		
		By		0.039	0.069	0.099		
Luminance of white		Y L		400	500		Cd/m ²	Note 4
White Uniformity		δ W (5P)		—	—	1.3		Note 6
Black Uniformity		δ B (5P)		—	—	1.3		Note 6
Cross Talk		HDsha%				1		Note 7
		VDsha%				1		

※ The measurement shall be operated 30 minutes after lighting at rating. (typical condition : IL = TBD mArms)

The optical characteristics shall be measured in a dark room or equivalent state with the method shown in Fig.1 below.

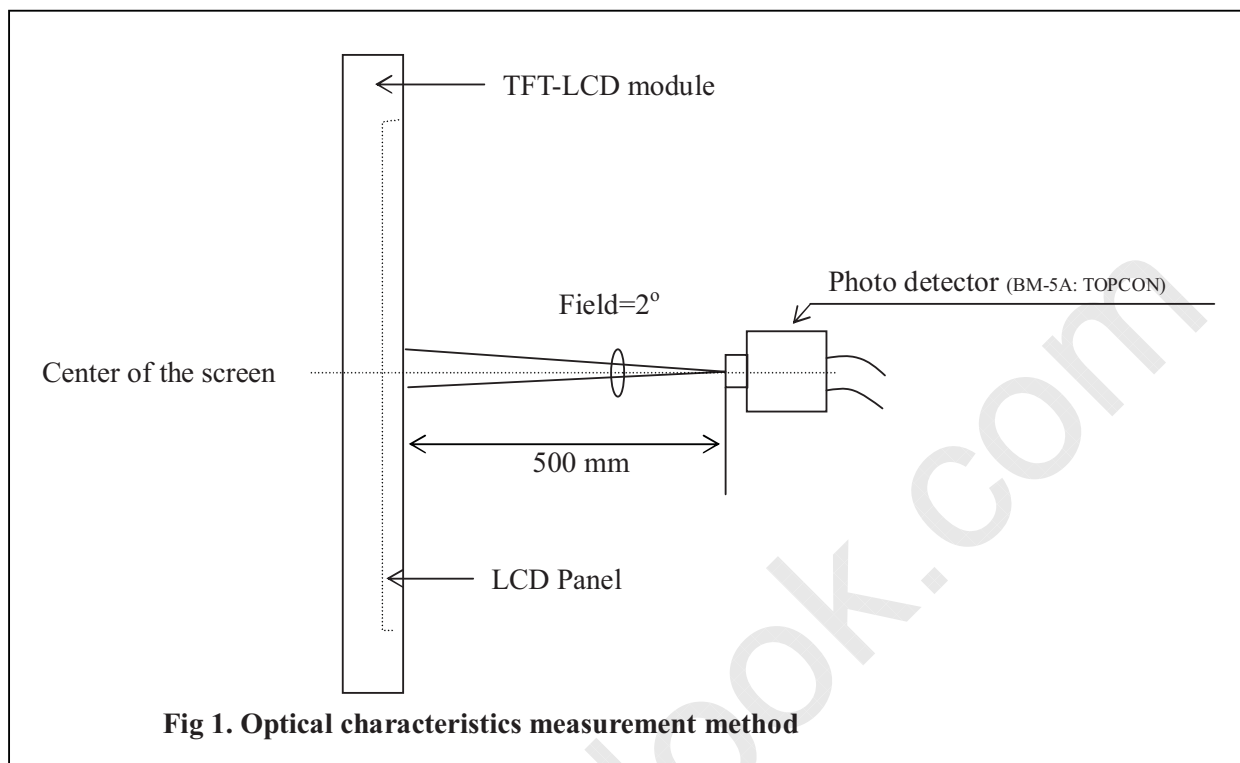

Note 1. Definitions of viewing angle range:

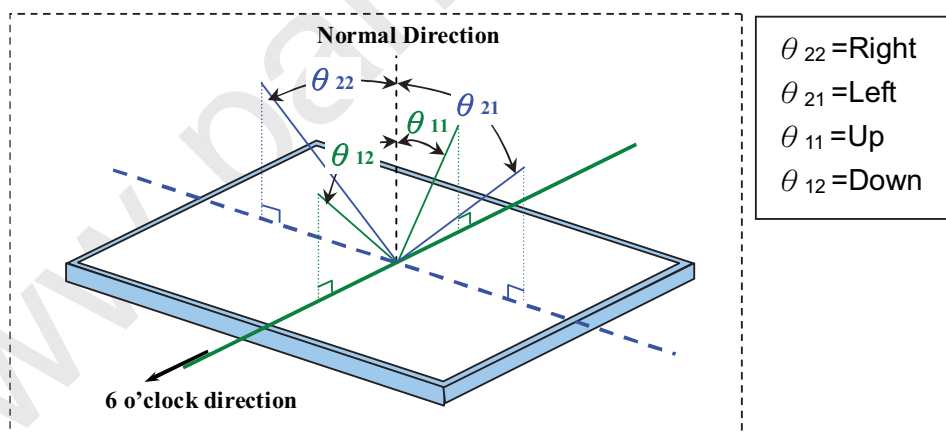



T315XW01 VF (QD32HL03)

17/23


Note 2. Definition of contrast ratio:

The contrast ratio is defined as the following.

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance (brightness) with all pixels white}}{\text{Luminance (brightness) with all pixels black}}$$

Note 3. Definition of response time (black to white):


The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

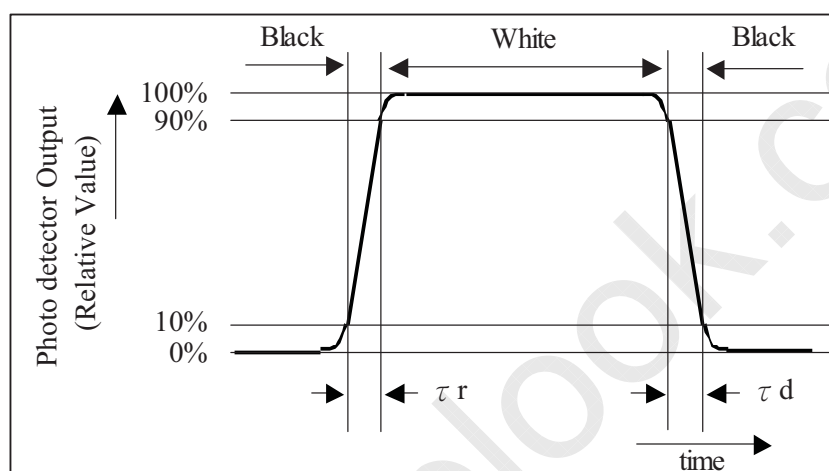

Note 4. This shall be measured at center of the screen.

Note 5. Definition of average gray to gray response time :

The average gray to gray response time is defined as the following figure and shall be measured by switching the input signal for "Original level" and "Target level" at each set levels

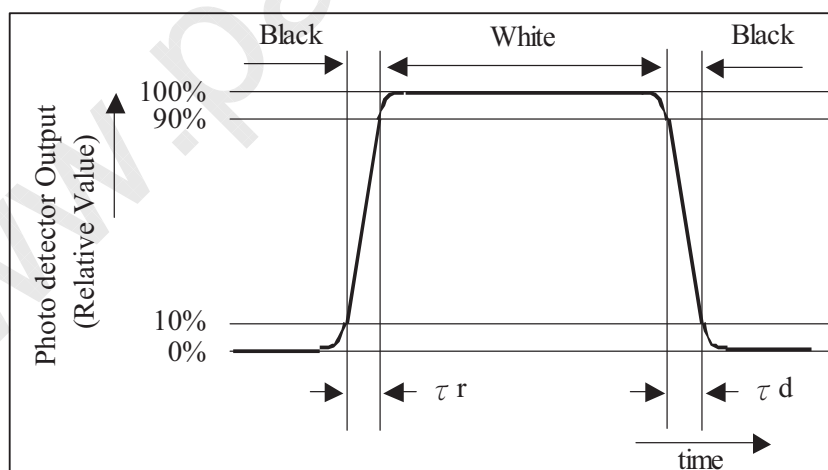



T315XW01 VF (QD32HL03)

18/23


		Rising Time																
		255	240	224	208	192	176	160	144	128	112	96	80	64	48	32	16	0
Falling Time	255	0																
	240		0															
	224			0														
	208				0													
	192					0												
	176						0											
	160							0										
	144								0									
	128									0								
	112										0							
	96											0						
	80												0					
	64													0				
	48														0			
	32															0		
	16																0	
	0																	0

Note 6. Definition of white uniformity:

White uniformity is defined as the following the number of measurement points within active area.

formula are $\delta w(5)$.

$$\delta w(5P) = \frac{\text{Maximum Luminance of 5 points}}{\text{Minimum Luminance of 5 points}}$$

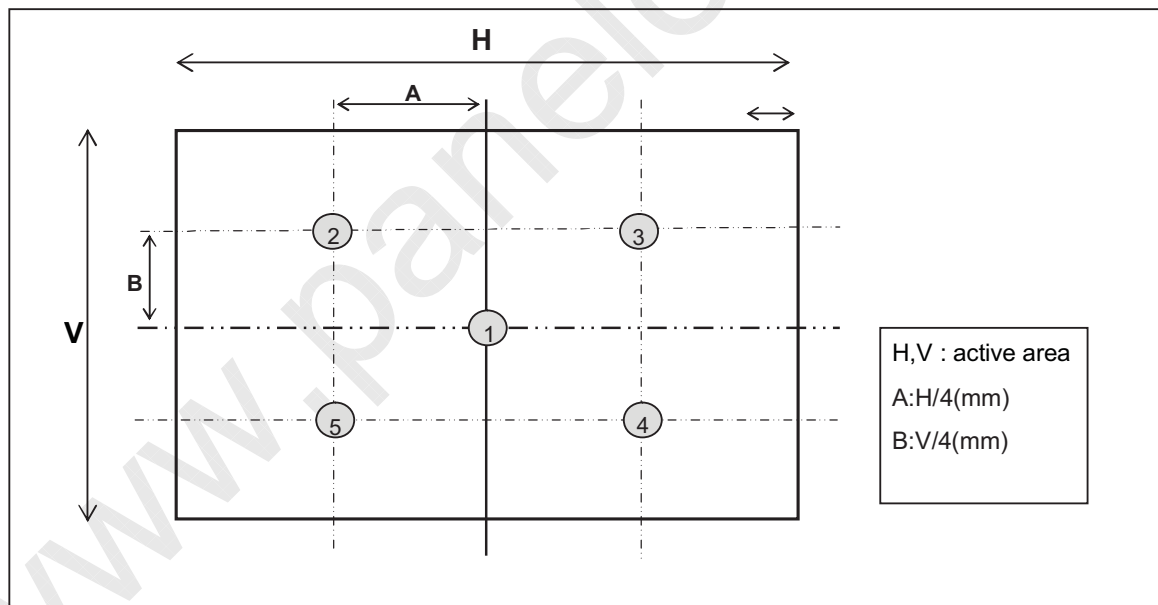



T315XW01 VF (QD32HL03)

19/23

Note 7. Definition of Shadow:

Horizontal Shadow:

Y_{wh} is the brightness of point P1 when module display B pattern

Y_{crs} is the brightness of point P1 when module display A pattern


$$\text{H-Shadow (Dsha\%)} = (| Y_{wh} - Y_{crs} | / Y_{wh}) \times 100$$

Vertical Shadow:

Y_{wh} is the brightness of point P2 when module display B pattern

Y_{crs} is the brightness of point P2 when module display A pattern

$$\text{V-Shadow (Dsha\%)} = (| Y_{wh} - Y_{crs} | / Y_{wh}) \times 100$$

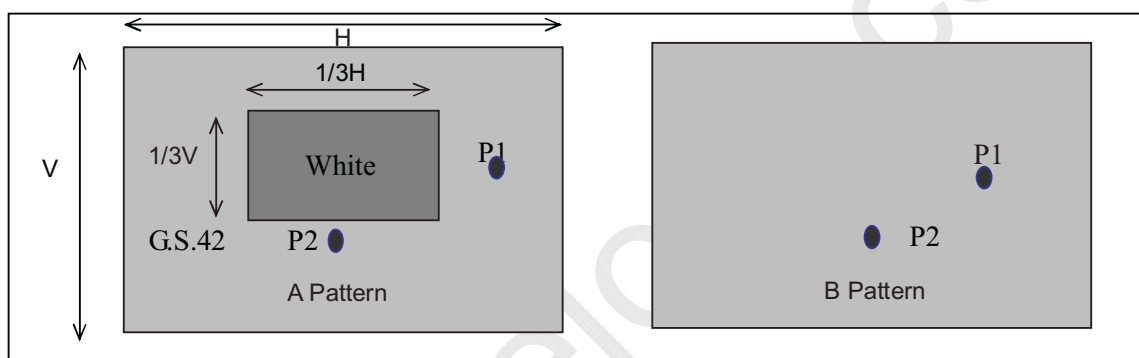




T315XW01 VF (QD32HL03)

20/23

7. Mechanical Specifications

1. Front View

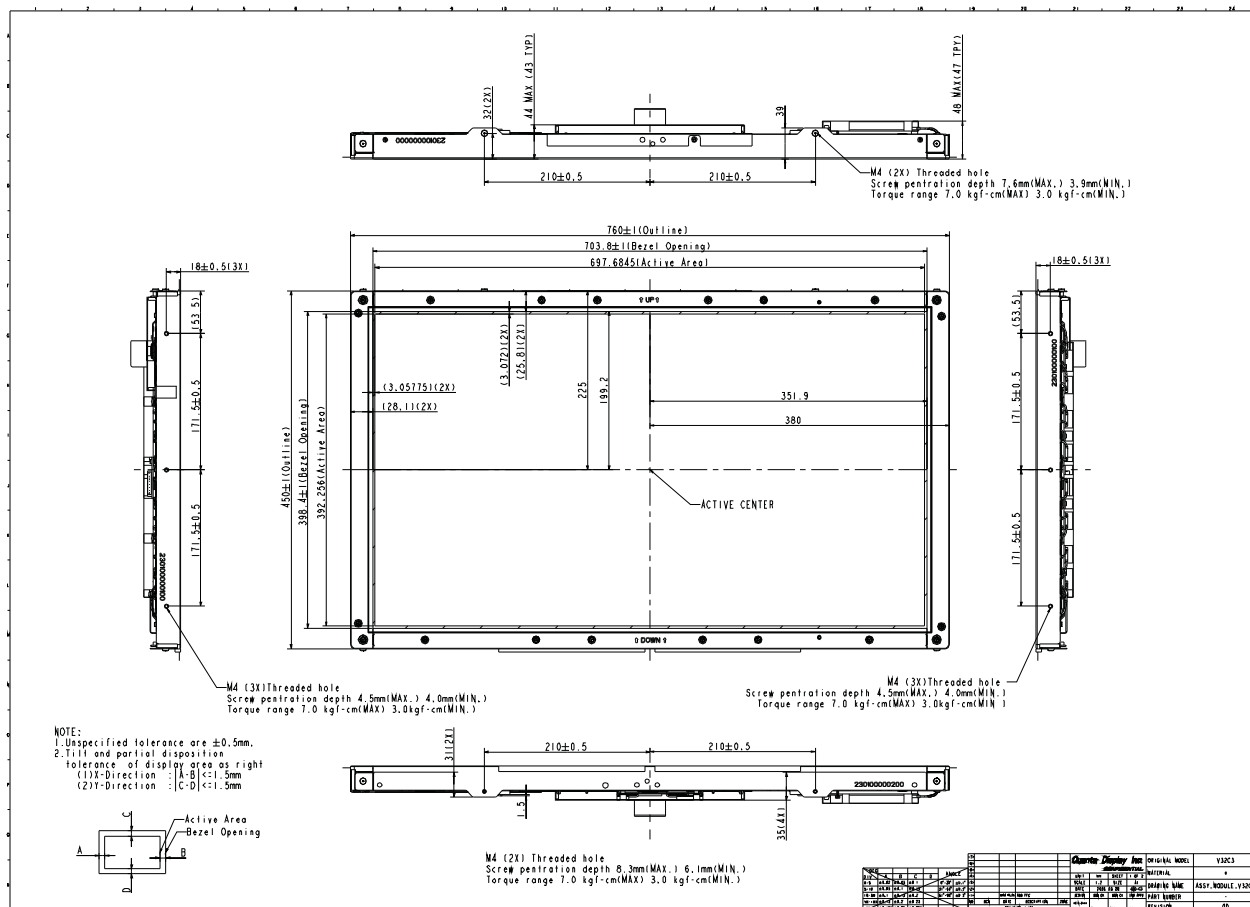




T315XW01 VF (QD32HL03)

21/23

2. Back View

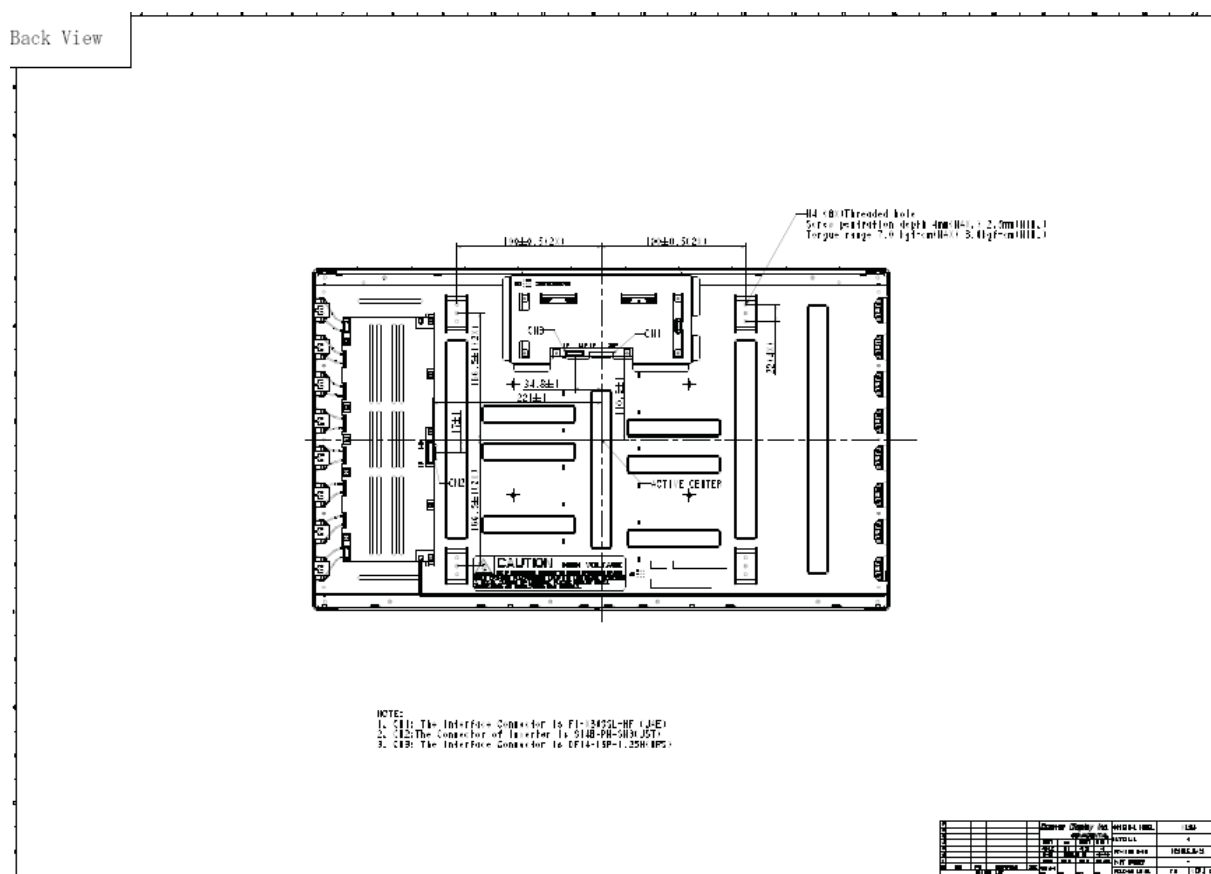



T315XW01 VF (QD32HL03)

22/23

8. Reliability Test

8-1. Reliability Items

No.	Test item	Conditions
1	High temperature storage test	Ta = 60℃ 240h
2	Low temperature storage test	Ta = -20℃ 240h
3	High temperature & high humidity operation test	Ta = 50℃ ; 80 %RH 240h
4	High temperature operation test	Ta = 50℃ 240h
5	Low temperature operation test	Ta = 0℃ 240h
6	Vibration test (non-operating)	Frequency: 10~500Hz, 1.0G , 20 min/each axis
7	Shock test (non- operating)	Gravity : 50G Pulse width : 11ms, half sine wave Direction : ±X,±Y,±Z Once for each direction.
8	ESD	Contact: Operating/Non-Operating ±8KV/±10KV Air: Operating/Non-Operating ±15KV/±20KV




T315XW01 VF (QD32HL03)

23/23

9. Others

1. LCD Module Label:

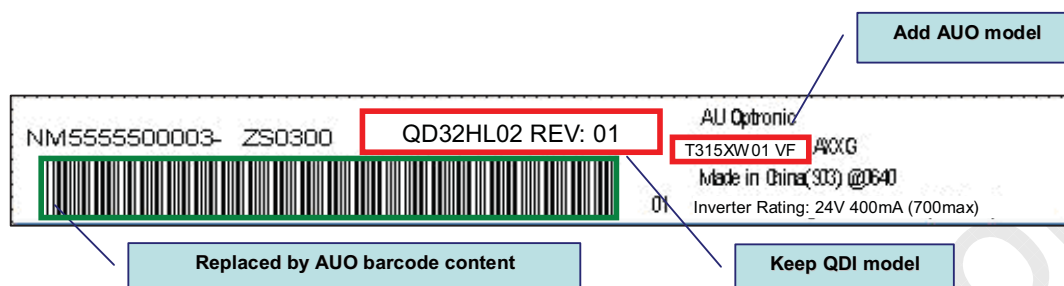

2. Adjusting volume has been set optimally before shipment, so do not change any adjusted value. If adjusted value is changed, the specification may not be satisfied.
3. Disassembling the module can cause permanent damage and should be strictly avoided.
4. Please be careful since image retention may occur when a fixed pattern is displayed for a long time.
5. If any problem occurs in relation to the description of this specification, it shall be resolved through discussion with spirit of cooperation.